METAL TO WOOD FASTENERS

LONG LIFE #10 ULTIMATE®





HEAD
5/16" hex head

THREAD
Major Hi Diameter: .200"/.190"
Major Low Diameter: .165"/.155"
Minor Diameter: .133"/.128"

POINT
Type-17 point helps to penetrate metal more quickly while minimizing chips.


26 Degree sharp point for quick piercing

WASHER
Dekfast® Multi-Seal™ Washer

MATERIAL
Carbon Steel

FINISH
Mechanical zinc plated shank with die cast head warranted against red rust for the life of the building

Wet paint application for consistent socket fit and weathering performance

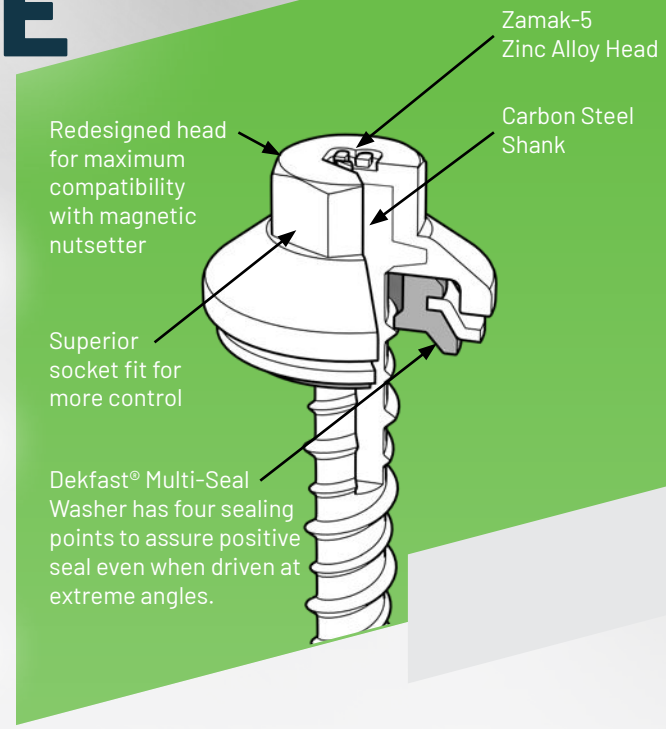

AVAILABLE SIZES

SIZE	ITEM #	BOX QTY
10-14 x 1	65712ZBN99JR	2,500
10-14 x 1-1/2	65713ZBN99JR	2,000
10-14 x 2	65714ZBN99JR	1,500
10-14 x 2-1/2	65715ZBN99JR	1,000

STRENGTH CHARACTERISTICS

MINIMUM TORSIONAL	MINIMUM TENSILE	MINIMUM SHEAR	PULL OUT SPF2-1.5" PENETRATION	REVOLUTIONS/ IN.
68 in. lbs.	2,100 lbs.	1,265 lbs.	925 lbs.	7.0

All test results and recommendations are based on laboratory tests. Specific job site conditions should be taken into consideration when specifying the proper fastener. Actual field values may vary, therefore we assume no liability for use of this information. Pull out values are a measurement of wood material strength.

Installation Instructions - Do not use impact style guns. Use an electric screw gun with 2,500 RPM max.

ATLAS BUILDING PRODUCTS

Scan here for more product information and to view our entire catalog!

ASHLAND, OH
1628 TROY RD
ASHLAND, OH 44805
(800) 321-6977

FLAT ROCK, NC
161 COMMERCIAL BLVD
FLAT ROCK, NC 28731
(828) 692-2603

HOUSTON, TX
4822 N. SAM HOUSTON PKWY W., STE 100
HOUSTON, TX 77086
(800) 503-2105